

DOCK BUMPER

LOADING DOCK BUMPER

Revision: 30 May 2024 5:03 PM
Boplan reference: DB1450-0250-100YE


PRODUCT SPECIFICATIONS



APPLICATION	
Environment	Robust, wear resistant bumper for dock protection during loading and unloading of trucks.
Use	In and outdoor
Operational temperature	-30°C up to +40°C
Advisory speed	Walking speed of manoeuvring / backwards driving trucks

PROPERTIES	
Material	Casted PU (Polyurethane) with zinc coated integrated steel plate
Hardness	Shore A - 90
Tear, cut and abrasion resistance	Outstanding
Exposure to light	Excellent (UV resistant)
Seawater resistance	Excellent
Oil and gasoline solvent resistance	Excellent
Chemical resistance	Excellent. For specific chemicals, ask your local sales office.
Robustness	Extremely robust with internal thick steel reinforcement plate

STANDARD COLOURS	
Bumper	Standard: Yellow RAL 1003

SIZE AND PROPERTIES	
Product dimensions	Width: 246 mm Depth: 102 mm Height: 442 mm
Gross weight	9,216 kg
Packaging dimensions	470 mm x 270 mm x 100 mm
Number of fixations	2 pcs (included)

FIXATIONS			
		ZC (Zinc coated)	SS (Stainless steel)
STANDARD	Concrete screw	 Ø17mm x 130mm	Not available

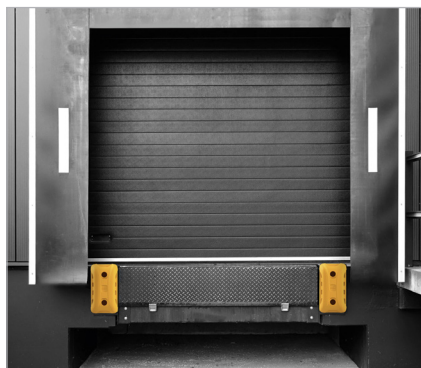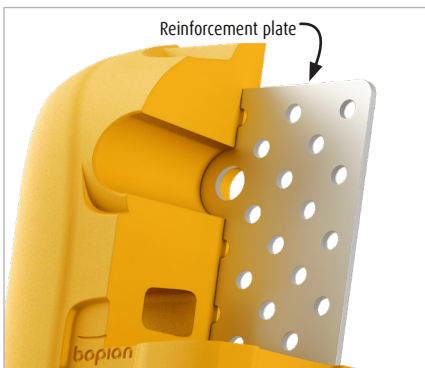

REFERENCE LIST - DOCK BUMPER

DB1450-0250-100YE Dock Bumper - 442x246x102mm - YE

